


Product Information



Integrated Tridonic driver and Epistar chips provide best quality for the value. Medium power consumption of 42 W and luminous flux up to 4860 lm (135 lm/W.). 3000 to 6500 K color temperature at customer's request. Can be used in industrial and storage facilities. IP65 certified.

Dimensions

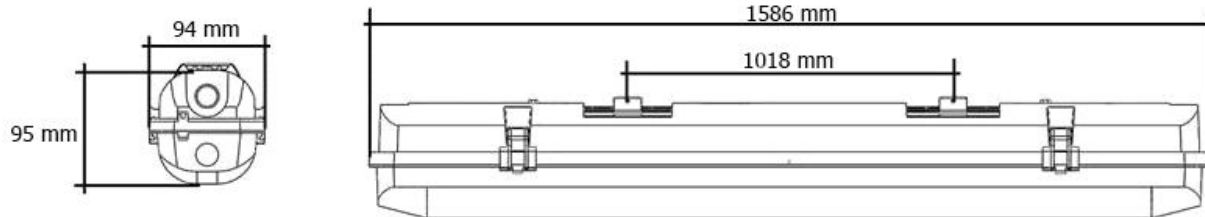

Technical characteristics

Electrical data

Operating mode	Electronic control gear (ECG)
Nominal wattage	42.00 W
Nominal voltage	220 - 240 V
Mains frequency	50/60 Hz
Power factor λ	>0.90

Light technical data

Color temperature	3000 - 6500 K
Luminous flux	4830 - 5670 lm
Color rendering index Ra	>80
Luminous efficacy	115 - 135 lm/W
Beam angle	180°

Dimensions & weight

Length	1580 mm
Width	100 mm

Height	100 mm
Weight	2,5 kg
Materials	
Body material	Polycarbonate (PC)
Product color	Gray
Diffuser material	Polycarbonate (PC)
Diffuser color	Opal
LED driver	Tridonic
LED chip	240 pcs. Epistar SMD 5630
Operating conditions	
Ambient temperature range	-30...40 °C
Lifespan	40000 h
Number of switching cycles	25000
Capabilities	
Dimmable	No
Type of connection	Wago Terminal, 3-pin

Order information

Product code: I15842